

⚠ WARNINGS ⚠


- Risk of electric shock - Disconnect power at the source before installation.
- If you are unsure about the installation or the maintenance of the wall light, please consult an electrician.
- Do not make or alter any holes in the wiring enclosure or modify any electrical componentry.

CAUTIONS

- To insure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code and applicable local codes or ordinances.
- Turn off the main power at the circuit breaker before installing the fixture.

WIRING AND MOUNTING INSTRUCTIONS

1. Ensure power has been switched off before starting installation.
2. If you are replacing an existing fixture, remove and disconnect the old fixture first.
3. Expose the supply wires from the junction box.
4. Ensure approximately 1/2in of insulation is removed from each wire.
5. Position the supply wires with the white wire (neutral) on one side of the junction box and the black wire (hot) on the other side of the junction box.
6. Attach the support cross bar by using the provided screws. These screws will screw into the junction box.
7. Connect the green fixture wire (ground) to the supply ground wire (green or bare copper) using the provided wire nut.
8. Connect the white wire (neutral) from the fixture to the white wire (neutral) from the junction box using the provided wire nuts.
9. Connect the black wire (hot) from the fixture to the black wire (hot) from the junction box using the provided wire nuts.
10. Align the canopy base over the mounting screws on the support cross bar.
11. Thread the mounting screws through the slots in the canopy that align with the support cross bar mounting holes. Adjust the canopy until the screws are at the small end of the keyhole slots.
12. Ensure that the wires are placed properly within the junction box. Tighten the mounting screws until the canopy base is seated firmly against the ceiling.
13. The color temperature of the light may be adjusted from 5 options (2700K/3000K/3500K/4000K/5000K). When changing the color temperature the fixture must be powered off. Shown in figure 2.
14. Place the diffuser on the canopy. Then place the metal ring on the diffuser. Let the 3 screws from the ring mount tubes protrude through the holes in the metal ring.
15. Twist the three decorative nuts onto the ring mount tubes to secure the ring and diffuser.
16. The installation is now complete, restore power and confirm functionality.

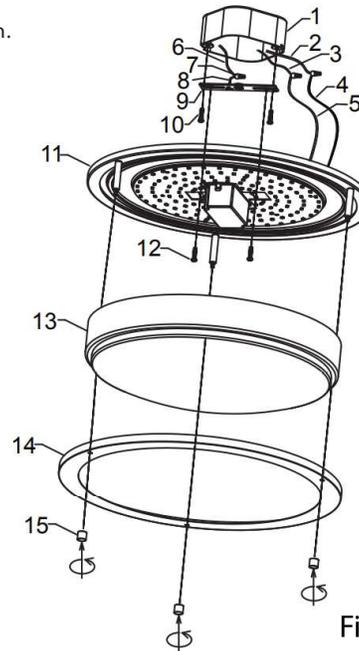

1	Junction Box
2	Black supply wire
3	White supply wire
4	Black fixture wire
5	White fixture wire
6	Supply ground wire
7	Wire nut
8	Fixture ground wire
9	Support cross bar
10	Junction box screws
11	Canopy
12	Fixture mounting screws
13	Diffuser
14	Metal ring
15	Cap nuts

Figure 1

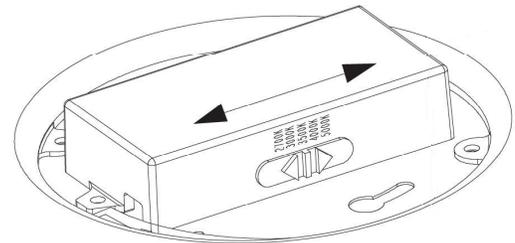


Figure 2

3 YEAR WARRANTY

Maxxima extends a 3 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.