



## 4" LED Rotatable Retrofit-Kit Installation Guide

MRL-412505, MRL-412505B

www.maxximastyle.com

### ⚠ WARNINGS ⚠

- Risk of electric shock or fire - Disconnect power at the source before installation.
- If you are unsure about the installation or the maintenance of the fixture, please consult an electrician.
- Do not make or alter any holes in the wiring enclosure or modify any electrical componentry.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.


### CAUTIONS

- The fixture must be wired in accordance with the National Electric Code (N.E.C) standards and any applicable local codes or ordinances.
- This fixture is suitable for DAMP locations.
- This fixture is designed for use with 120Vac, 50/60Hz only.
- The retrofit kit is accepted as a component of a luminaire where the suitability of the combination shall be determined by CSA or authorities having jurisdiction.

### Electrical Parameters:

Model	Input Voltage	Input Frequency	Input Current	Input Wattage
MRL-412505	120 VAC	60 Hz	80 mA	10 W
MRL-412505B				

### Product Dimensions:

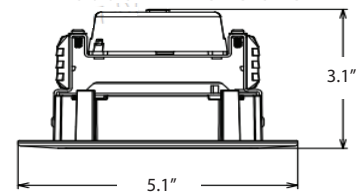

## INSTALLATION INSTRUCTIONS

1. Ensure the power has been turned off by switching the circuit breaker to the off position or by removing the fuse from the fuse panel.
2. If replacing an existing fixture remove and disconnect the existing fixture from the housing.
3. Select the desired color temperature by moving the selector switch shown in figure 1.
4. Twist the E26 adapter into the housing as shown in figure 2.
5. Connect the orange connector to the E26 adapter as shown in figure 3.
6. Tuck all wires into the housing and carefully push the LED trim until its outer edge is flush against the ceiling surface. Start by pushing one mounting plate against the inside of the housing until the other plate can be positioned and pushed up into the housing. Seen in figure 4.
8. Restore power and the light is now operational.

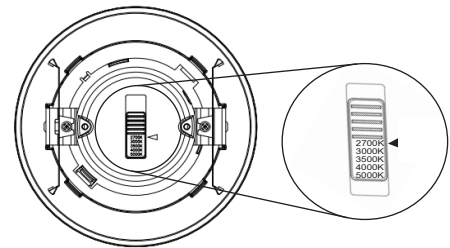


Figure 1




Figure 2

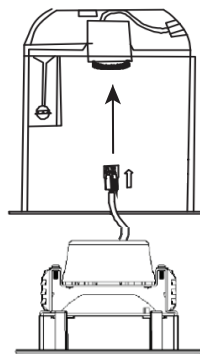


Figure 3

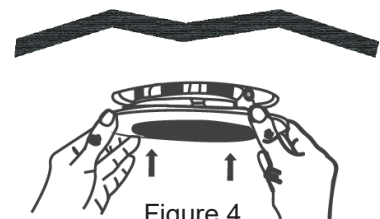


Figure 4

## 3 YEAR WARRANTY

Maxxima extends a 3 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.