

Slim Downlight With Night Light Installation Guide

MRL-S61265

www.maxximastyle.com

WARNINGS

- · Risk of fire or electric shock.
- If you are unfamiliar with electrical installations, consult a qualified electrician before proceeding.
- Turn power off from electrical panel before installation or maintenance.
- · Do not make or alter any holes in the wiring enclosure or modify any electrical componetry.

CAUTIONS

- Intended for installation in accordance with local codes and the National Electric Code (NEC).
- This fixture is designed for use with 120VAC, 50/60Hz only.
- Supply conductors must be rated for at least 90°C/194°F.
- · Suitable for damp locations.

INSTRUCTIONS

- 1. Ensure that power has been turned off by switching the circuit breaker or by removing the fuse from the fuse panel.
- 2. If replacing a previous fixture, remove that light and ensure the hole in the ceiling corresponds to the correct cutout diameter of about 158 mm (6.22 inches).
- 3. Select the desired color temperature, see figure 2.
- 4. Open the junction box and remove the appropriate knockout(s) on the side panel.
- 5. Insert the electrical supply wires through the knockout and secure with a cable clamp (not provided).
- 6. Using the provided wire nuts, connect the ground wire to the green wire terminal, black wire to hot wire terminal, white wire to neutral wire terminal, shown in figure 3.
- 7. Place all wiring and connections into the junction box, ensuring none are pinched.
- 8. Insert junction box through mounting hole. Align connector from j-box into the connector from LED. Twist the conects in counterclockwise directions and lock the quick connect, see figure 4.
- 9. Push spring loaded clips upwards and insert fixture base into the mounting hole. Release clips and fixture will be pulled flush with ceiling, seen in figure 5.
- 9. Installation is now complete. Restore power and check operation of the light fixture.
- **Night light mode: turn the light ON, OFF, ON within 3 seconds. Night light is now on.

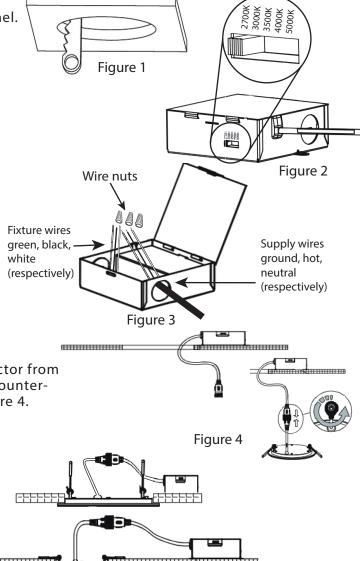


Figure 5

Maxxima extends a 3 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warrantied product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product

