

4", 6", and 8" New Construction Metal Plate Installation Guide

MRL-S48PLATE-10

www.maxximastyle.com

WARNINGS


- Risk of electric shock Disconnect power at the source before installation.
- If you are unsure about the installation, please consult an electrician.

CAUTIONS

- To insure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code and applicable local codes or ordinances.

MOUNTING INSTRUCTIONS

- 1. Ensure power has been switched off before starting installation.
- 2. Secure the construction metal plate to the ceiling joists using screws as shown in figure 1 ensure the plate is oriented such that the raised ridges are facing downward.
- 3. If the light fixture being installed is 4 inches then skip to step 5.
- 4. If the light fixture being installed is 6 inches then remove the inner square by cutting the four supports using metal shears and discard the inner ring. If the fixture is 8 inches, remove both inner squares as shown in figure 2.
- 5. Ensure the holding clips are bent up to suit the power supply module being used, as shown in figure 3.
- 6. Install the ceiling material of choice (not suplied) and ensure the cutout matches the metal plate shown in figure 4 and 5.
- 7. Install the desired slim downlight (not supplied) ensuring the clips are resting on the metal plate as shown in figure 6.
- 8. Restore power to the light fixture.

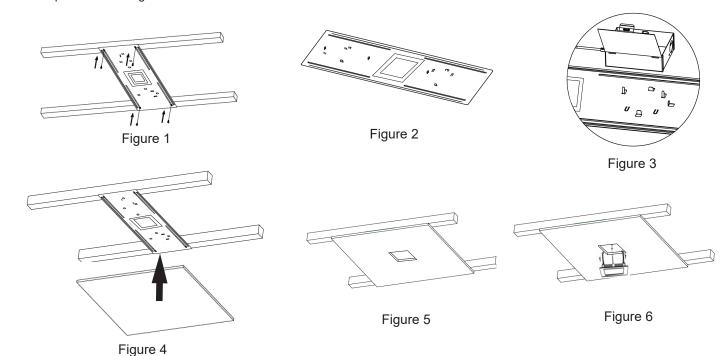

Maxxima extends a 1 year limited warranty to the original purchaser that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warrantied product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.