

MCL-711750W Instruction Sheet

WARNING

1. Risk of fire. Supply conductors (power wires) connecting to the fixture must be rated 90°C. If uncertain consult an electrician.
2. Risk of fire or electric shock. If not qualified, do not attempt installation. Contact a qualified electrician.
3. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
4. Make sure no bare wires are exposed outside the wire nut connectors.

NOTES

1. For your safety read and understand instructions completely before starting installation.
2. Before attempting Installation, check your local electric code, as it sets wiring standards for your locality.
3. Suitable for use in damp locations.
4. Reliable operating temperature is -20°C (-4°F) to 40°C (104°F).

Approved Dimmers

Maxxima: MEW-DM600, MEW-DM620, MEW-DM650

Leviton: 6631, 6674, DSL06-1LZ, TSL06-1LW

Lutron: SCL-153P, CTCL-153P, S-600P, S-600, PD-6WCL, DVCL-153P, AYCL-153P-WH, AYCL-600PNL-AL,


GE: 10464

Product Specification

P/N	Wattage (W)	Voltage (V)	Rated Input Frequency (Hz)	Dimension (DxH)
MCL-711750W	11.4 W	AC 120V	50/60Hz	7.4" x 1.4"

Installation Guide

1. Make sure POWER is turned OFF at the circuit breaker box or remove fuse.
2. Insert the mounting screws (2) into Junction Box as shown below.
3. Make the following wiring connections:
 - a. Connect the white wire from the fixture to the NEUTRAL wire in the box (typically white).
 - b. Connect the black wire from the fixture to the HOT wire in the box (typically black).
4. Align the slots on the fixture housing (6) to the mounting screws (2) in the Junction Box.
5. Secure the fixture in place by tightening the mounting screws.
6. Attach the dome (7) to the fixture housing (6) and turn it clockwise to secure it.
7. Turn power ON at circuit breaker (or replace fuse) and confirm that the fixture is functioning properly.

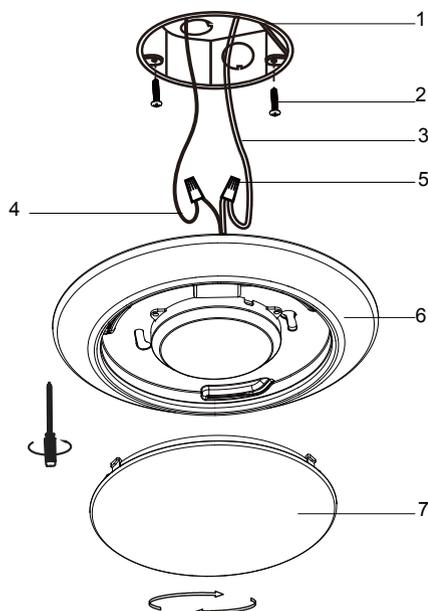

1. Junction Box (not included)
2. Fixture Mounting Screws (2 pieces)
3. White Fixture Wire
4. Black Fixture Wire
5. Wire Nut (2 pieces)
6. Fixture Housing (1 piece)
7. Dome

Three Year Warranty

Maxxima extends a 3 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.